

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 September 2005 (22.09.2005)

PCT

(10) International Publication Number
WO 2005/087618 A1

(51) International Patent Classification⁷: **B65D 83/76**

(21) International Application Number:
PCT/KR2005/000082

(22) International Filing Date: 11 January 2005 (11.01.2005)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:
20-2004-0007353 17 March 2004 (17.03.2004) KR

(71) Applicant (for all designated States except US): **YON-
WOO CO., LTD.** [KR/KR]; 473-5, Gajwa-dong, Seo-gu,
Incheon 404-250 (KR).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KEE, Jung,
Hyun** [KR/KR]; 81-59, Pumyang-Apartment 104-702,
Gajwa-dong, Seo-gu, Incheon 404-250 (KR).

(74) Agent: **JOUNG, Suk, Young**; 828-8, New-Seoul Build-
ing, 401 Yeoksam-dong, Gangnam-gu, Seoul 135-080
(KR).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: DISPENSER WITH SEALED DISPENSING VALVE UNIT

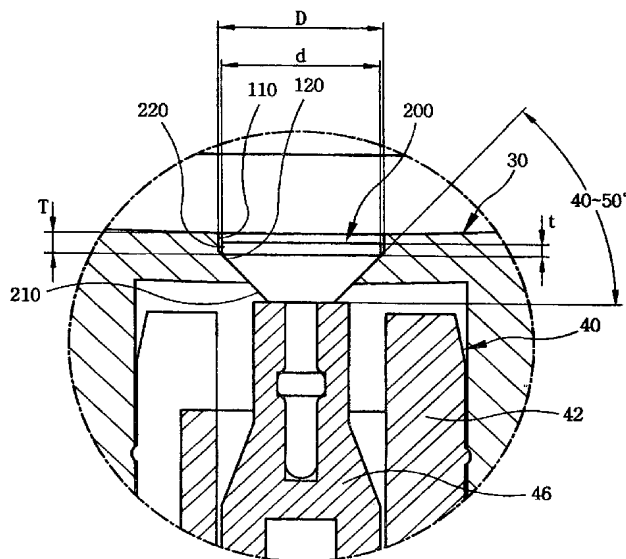

(57) Abstract: A dispenser with a sealed dispensing valve unit is disclosed. The dispenser is secured to a mouth of a hermetic casing, and discharges contents through a center of an upper plate of a button. The dispenser includes an outlet hole (100) bored in a central portion of the button. An inclined inner surface defines a lower portion of the outlet hole, and a vertical inner surface extends from an upper end of the inclined inner surface to a predetermined height. The dispenser also includes a dispensing valve (200) having at a lower portion thereof an inclined outer surface to selectively come into contact with the inclined inner surface of the outlet hole due to operation of a pumping means, thus opening or closing the outlet hole. Further, a vertical outer surface extends upwards from an upper end of the inclined outer surface to a predetermined height.

WO 2005/087618 A1